

ALUR – Tower TS1

TS1

Technical data


vertical truss	>	4KH-30
maximum height	>	7,5 m
maximum load	>	1000 kg (with chain hoist)
total weight	>	110 kg

TS1 - list of items for 1 tower 7,5 m high

TS1 01	steel base with wheels	1 piece
TS1 02*	head section (wire rope wheels)	1 piece
TS1 02C*	head section (chain wheels)	1 piece
TS1 03	sleeve block	1 piece
TS1 04**	short outrigger	4 pieces
TS1 05**	long outrigger	4 pieces
TS1 06	manual rope winch	1 piece
TS1 07	hinge set	1 piece
4KH-30-L500	vertical truss 0,5 m	1 piece
4KH-30-L2000	vertical truss 2,0 m	2 pieces
4KH-30-L3000	vertical truss 3,0 m	1 piece

* choose one version


** choose long or short outriggers (short are only for indoor applications)

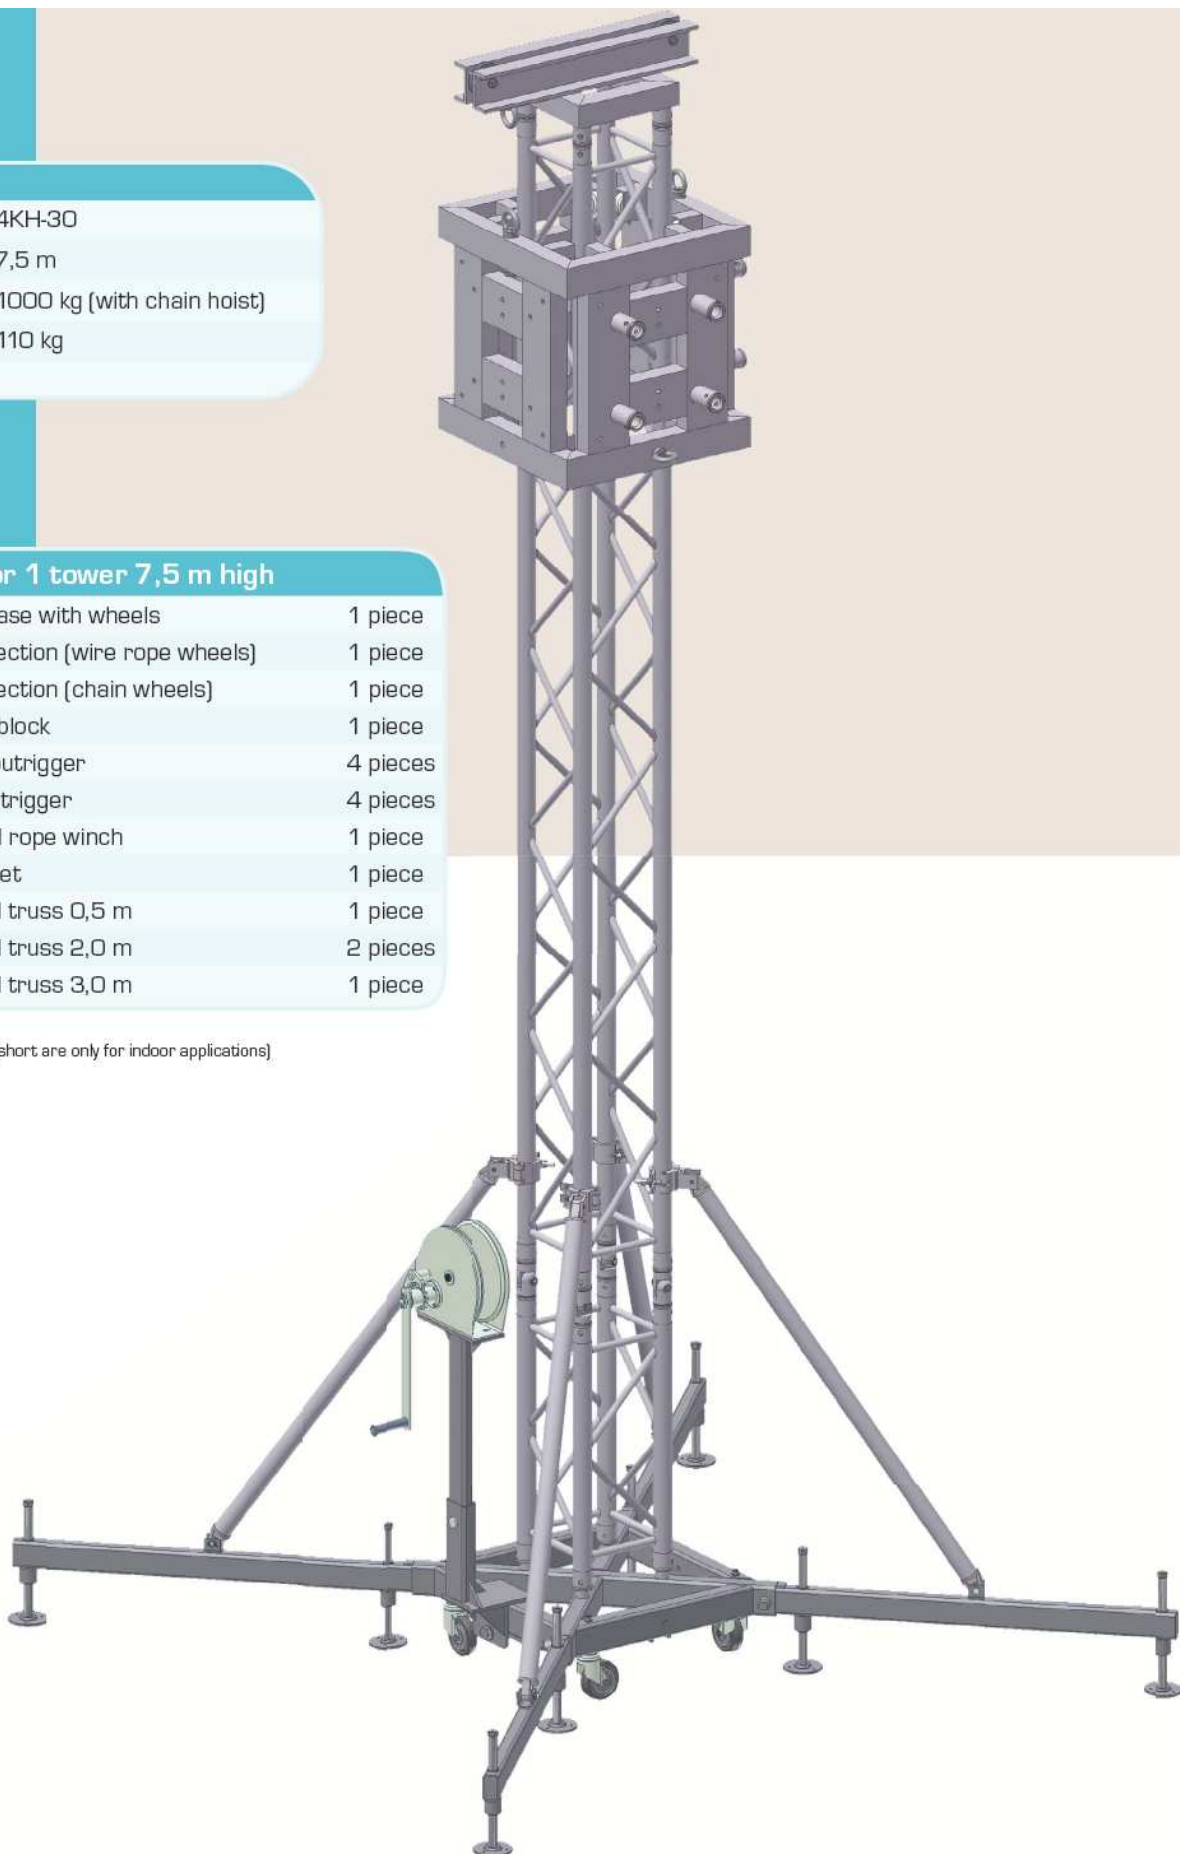



TS1 06 HAND WINCH

manual wire winch incl. holder

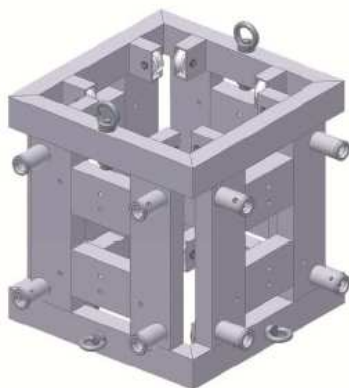

TS1 03 SLEEVE BLOCK

sleeve block designed for 4KH-3D vertical truss, horizontal connections for K-3D, KH-3D and K-4D, KH-4D truss systems



TS1 07 HINGE SET

set of 4 hinges for tower truss erecting



TS1 04 SHORT OUTRIGGER

supplement for tower base, short legs are used for indoor small ground supports



TS1 05 LONG OUTRIGGER

1,2 m long base supports with 2 leveling screws



TS1 02 HEAD SECTION

top section of tower, wheels for chain or wire rope, mounted eye bold for securing sleeve block



TS1 01 TOWER BASE

steel tower base equipped with wheels, for use with long or short outriggers